


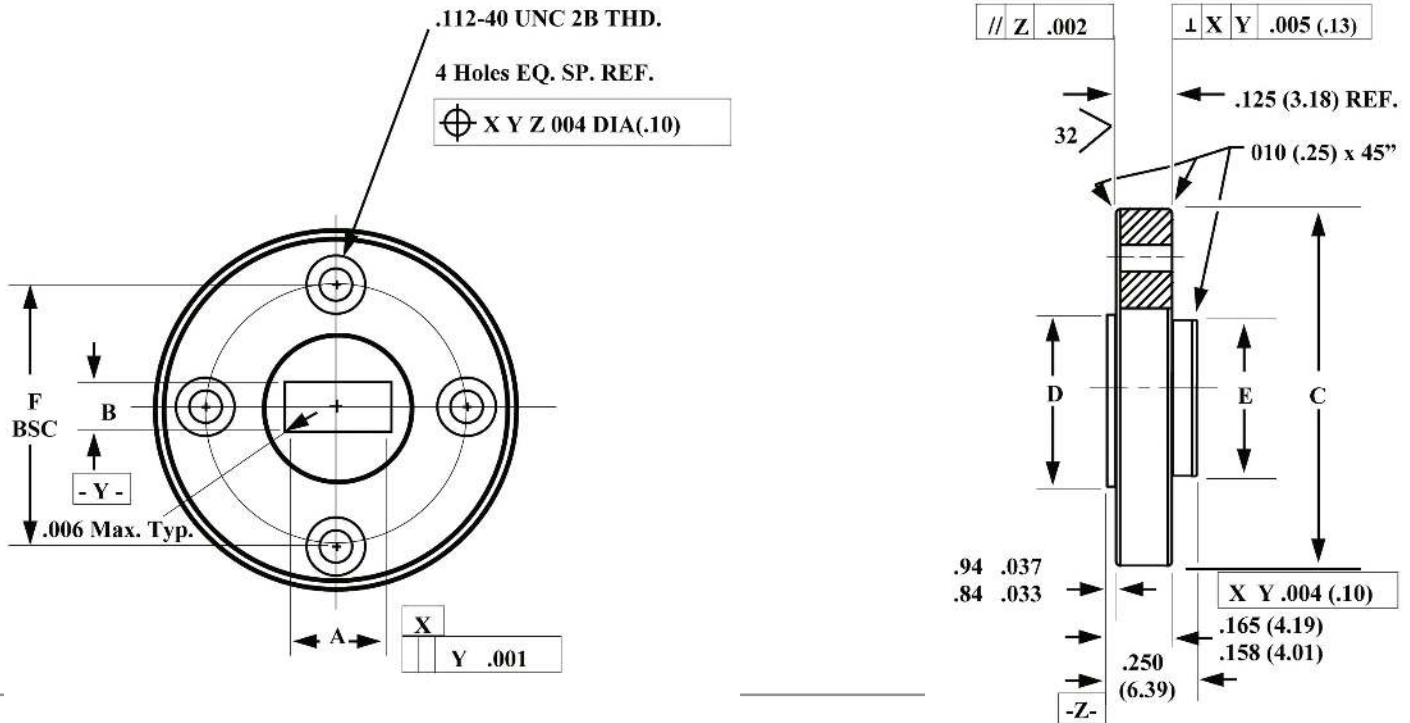

Note: Flange can be ordered with or without holes for pins

MIWV Band	Frequency Band (GHz)	MIL Part Number M3922/67	A +.002/-.000 (.05)	B +.002/-.000 (.05)	C +.000/-.002 (.05)	D ± .005 (.13)	E ± .005 (.13)	F BSC	MIWV Flange Designation
K	180.0 260.5	-004	.502 (12.75)	.252 (6.40)	1.125 (28.58)	.625 (15.88)	.625 (15.88)	.312 (7.92)	UG-425/U
A	26.5 40.0	-005	.362 (9.19)	.222 (5.64)	1.125 (28.58)	.500 (12.70)	.468 (11.89)	.9375 (23.81)	UG-381/U
B	33.0 50.0	-006	.306 (7.77)	.194 (4.93)	1.125 (28.58)	.500 (12.70)	.468 (11.89)	.9375 (23.81)	UG-383/U
U	40.0 60.0	-007	.270 (6.86)	.167 (4.47)	1.125 (28.58)	.500 (12.70)	.468 (11.89)	56.25 (14.29)	UG-383/U-M
V	50.0 75.0	-008	.230 (5.84)	.156 (3.96)	.750 (19.05)	.375 (9.53)	.312 (7.92)	56.25 (14.29)	UG-385/U
E	60.0 90.0	-009	.204 (5.18)	.143 (3.63)	.750 (19.05)	.375 (9.53)	.312 (7.92)	56.25 (14.29)	UG-387/U
W	75.0 110.0	-010	.182 (4.62)	.132 3.35	.750 (19.05)	.375 (9.53)	.312 (7.92)	56.25 (14.29)	UG-387/U-M
F	90.0 140.0	N/A	.141 (3.58)	.101 (2.56)	.750 (19.05)	.375 (9.53)	.312 (7.92)	56.25 (14.29)	UG-387/U-M
D	110.0 170.0	N/A	.126 (3.20)	.094 (2.39)	.750 (19.05)	.375 (9.53)	.312 (7.92)	56.25 (14.29)	UG-387/U-M
G	140.0 220.0	N/A	.112 (2.84)	.089 (2.21)	.750 (19.05)	.375 (9.53)	.312 (7.92)	.9375 (23.81)	UG-387/U-M
H	140.0-220.0	140.0-220.0	140.0-220.0	140.0-220.0	140.0-220.0	140.0-220.0	140.0-220.0	140.0-220.0	140.0-220.0
J	140.0-220.0	140.0-220.0	140.0-220.0	140.0-220.0	140.0-220.0	140.0-220.0	140.0-220.0	140.0-220.0	140.0-220.0